




## S480 Dual DVB-S2 PCIe Specification

- ➔ Win8 support
- ➔ Dual DVB-S2 PCIe
- ➔ Low power consumption DVB-S2 chipsets
- ➔ Low profile & High speed PCIe interface
- ➔ Bundled software myTeVii
- ➔ Bundled IP software TeViiData
- ➔ Fully compatible with Windows Media Center

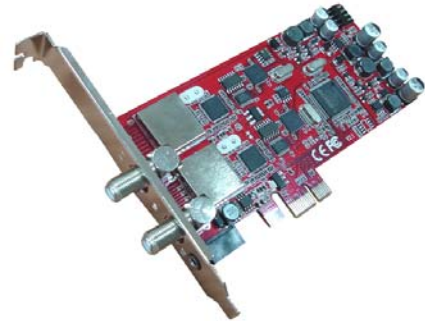

### Software Key Features

- Dual tuner -Watching one HD channel while recording another simultaneously
- Watch DVB-S2/DVB-S TV and listen digital radio on PC
- Linux driver available
- Support HDTV (MPEG-4 AVC/ H.264 up to 1080i)
- Real-time recording in MPEG/TS format
- Pre-scheduled & wake-up recording
- DiSEqC 1.0/1.1/1.2 & USALS support
- Time-shifting
- Electronic Program Guide (EPG)
- Subtitles
- Plug-in Interface support
- Favorite list
- On Screen Display (OSD)
- Remote control support
- Support English/Russian/German/French & other languages
- Compatible with Windows Media Center



# S480 Dual DVB-S2 PCIe Specification

## Specification

- Input terminal: F-type 75 Ohm
- Receiving frequency: 950~2150 MHz tuning range

## LNB & Switch control

- LNB supply voltage: 13V/18V
- DiSEqC: 1.0/1.1/1.2
- Symbol rate: 2~45Msps
- Antenna & LNB control: 22KHz

## Interface

- PCI Express X1

## Package Includes

- S480 Dual DVB-S2 PCIe card
- Remote control & infrared sensor cable
- Installation CD
- Short & Standard Profile brackets
- Quick Installation Guide (English & German)

## System Requirements

- Microsoft Windows 8 / 7 / Vista / XP
- 2.0GHz CPU (2.4GHz for HDTV)
- 256M RAM (1GB for HDTV)
- VGA card with at least 128MB memory
- Microsoft Direct X 9.0C or above
- Sound card or on-board sound chip
- One free PCI Express X1 slot